

LineRoute ETL23

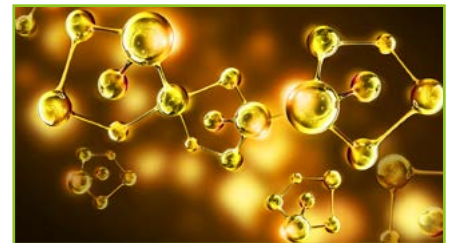
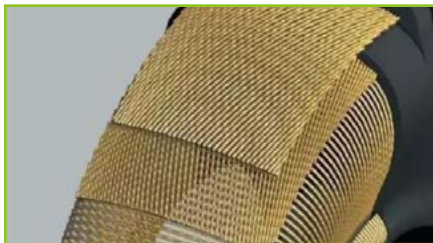


TECHNICAL FEATURES

Ultra-tensile cord incorporated into the body material for excellent durability and retreadability.




The highly effective contact area separates loading pressure evenly for better mileage performance.

The latest silica-rich formula and cutting edge mixing technology ensure excellent tyre longevity and low rolling resistance.



SIZE RANGE



Size	PR	LI/SS	Tread Depth (mm)	M+S						
385/55R22.5	20PR	160K	15	√	√	C	B	72dB	B	
385/65R22.5	20PR	160K	15.5	√	√	C	B	72dB	B	
385/65R22.5	24PR	164K	15.5	√	√	C	B	72dB	B	