


MixWork EAM62




TECHNICAL FEATURES


The latest tread compound is used for outstanding mileage and resistance for high-scrub applications.

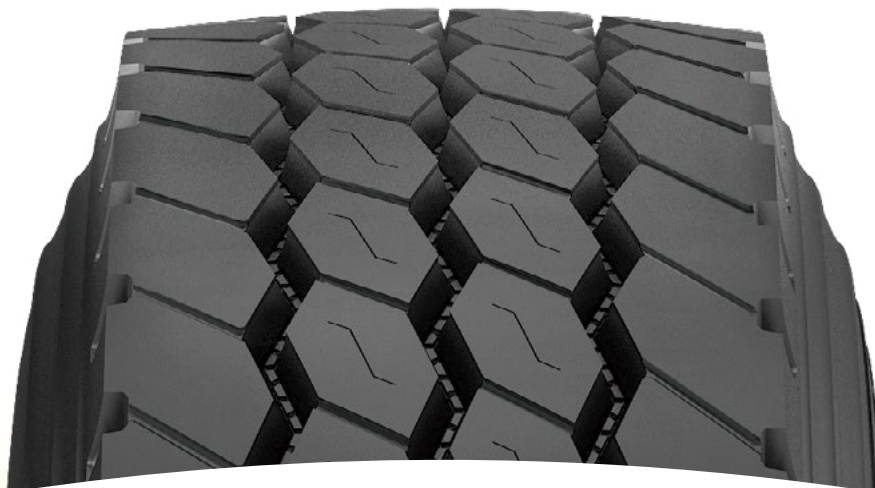

The reinforced bead construction provides excellent structural durability to extend tyre life.

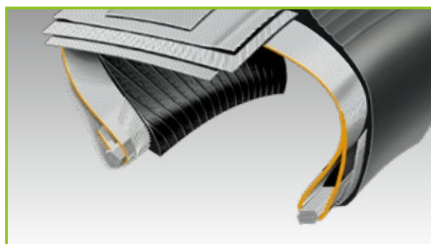



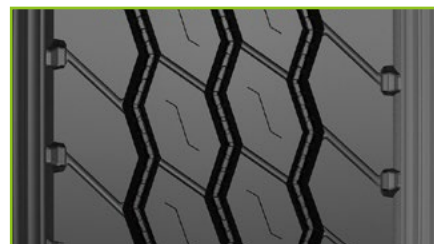

A unique 4-ribbed zip-zag design provides outstanding handling for all-axle applications.



SIZE RANGE



Size	PR	LI/SS	Tread Depth (mm)	M+S				
13R22.5	20PR	156/150K	18	√	√	C	B	72dB B
315/80R22.5	20PR	156/153L	17	√	√	C	B	72dB B