

MultiRoute EDR51






TECHNICAL FEATURES

The unique pattern ensures the fuel efficiency and even wear for lower operation costs.



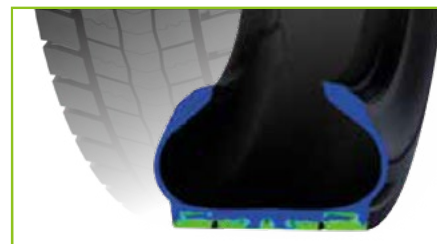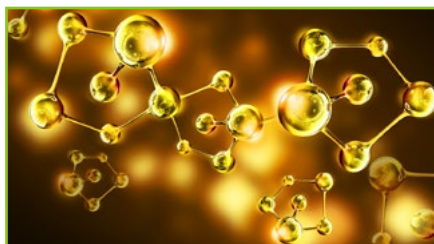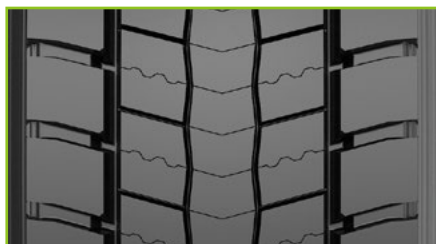

The tread formula ensures grip and traction in low temperature environments.

The low deformation frame structure ensures long-term stability and durability for increased safety.



SIZE RANGE



Size	PR	LI/SS	Tread Depth (mm)	M+S				
275/80R22.5	16PR	146/143L	22	√	√			
295/60R22.5	18PR	150/147L	19	√	√	D	C	74dB B
295/80R22.5	18PR	154/149L	22	√	√	D	C	74dB B
315/70R22.5	18PR	156/150L	20	√	√	D	C	74dB B
315/80R22.5	20PR	156/153L	22.5	√	√	D	C	74dB B